



Bobcat®

Compact Tractors

CT4045 | CT4050 | CT4055 | CT4058





A woman with brown hair, wearing a blue and white plaid shirt over a grey V-neck top, is driving a white Bobcat tractor. She is looking towards the camera with a slight smile. The tractor has orange safety lights on its sides and a Bobcat logo on the front. The background shows green trees and a clear blue sky.

IT TAKES HARD WORK TO LIVE THE SIMPLE LIFE

THE BOBCAT BRAND was literally born in a barn. Designed for a turkey farmer, the first compact loader was destined to clean small livestock pens and stalls. Ever since, Bobcat® equipment has been a mainstay on ranches, dairies and all kinds of fruit, grain and vegetable operations. If there's one thing we've learned about life on the farm, it's that you'll never run out of things to do.

Your lifestyle is a perfect match for the Bobcat work style. With a lineup of 15 powerful compact tractors, Bobcat delivers performance, ease of use, versatility... everything you need to make the most of your land. And it comes in a machine that's familiar, comfortable and durable enough to be worthy of the world's hardest-working brand.

The simple life is busier than most people think.
Get the only tractor that's tough enough to

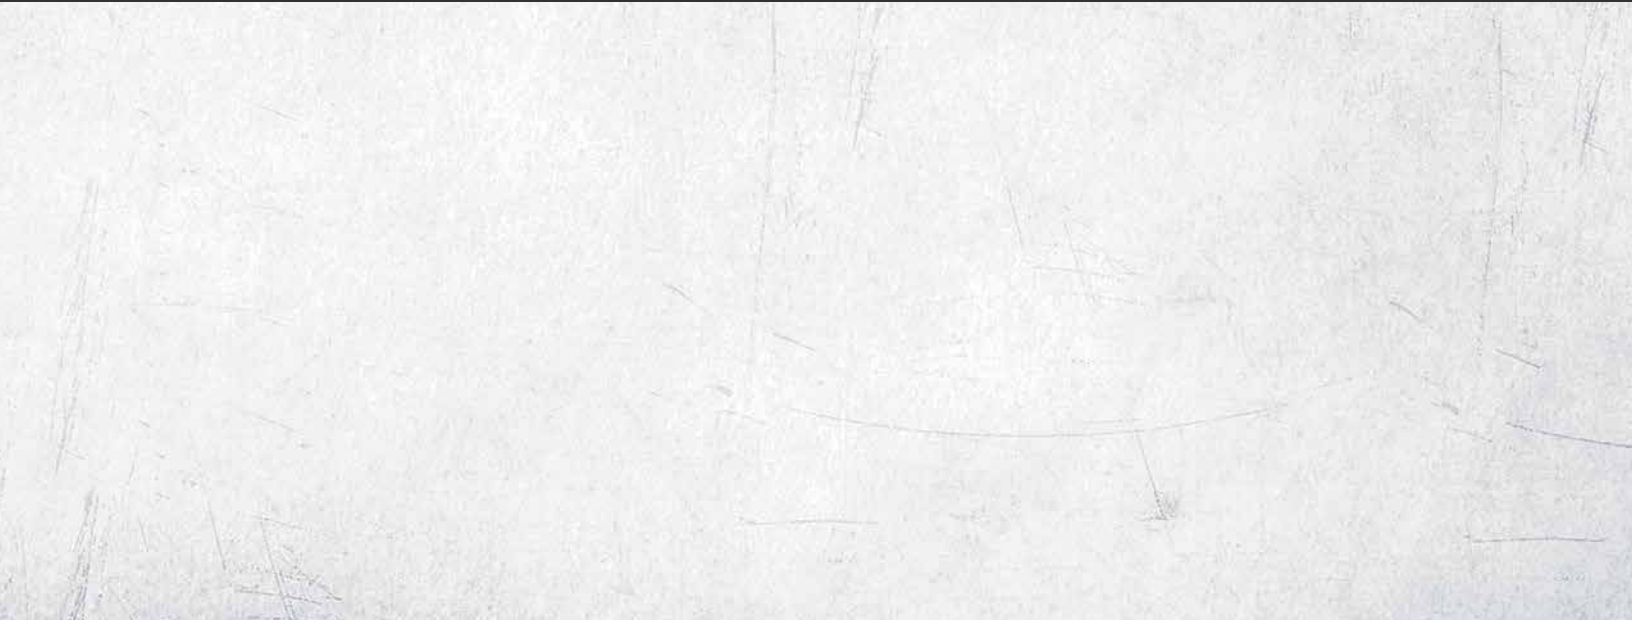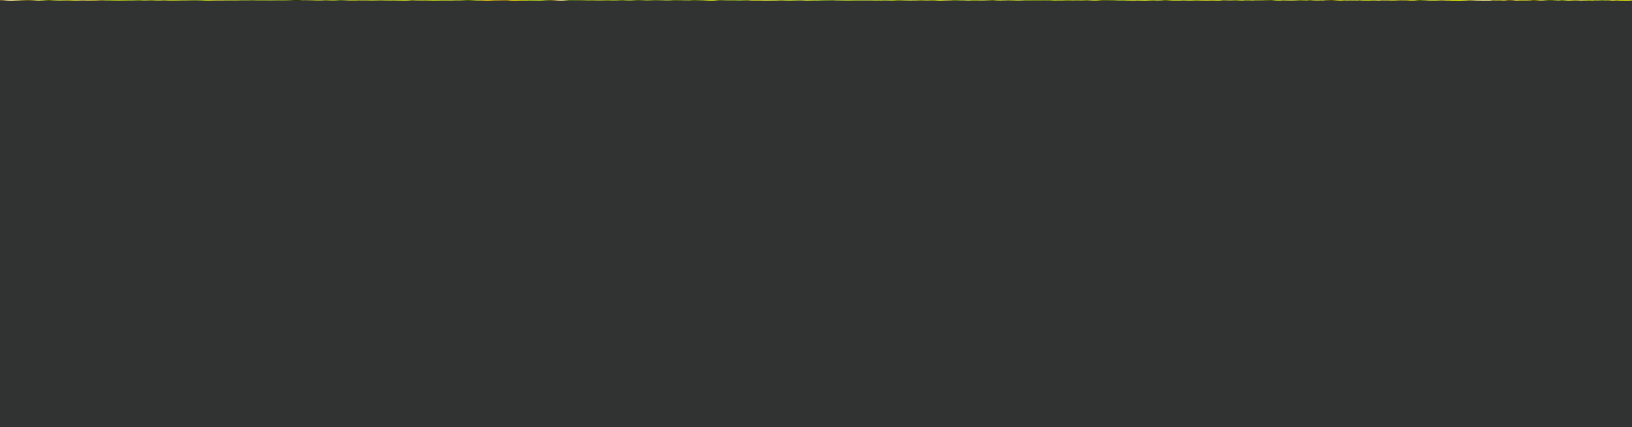

Stable Wheelbase

The 71.2-inch wheelbase of the 4000 platform tractors maximizes your towing capacity and optimally distributes weight to each wheel for more stability on hilly terrain.

More Ground Clearance


Class-leading ground clearance improves maneuverability in rough or muddy terrain.

Manual or Hydrostatic Transmission

Pick a model that works for you, with the controls and capabilities that fit your preference, budget and working style.

Manual Synchro Shuttle Transmission

Manual synchro shuttle transmission enables shift-on-the-fly

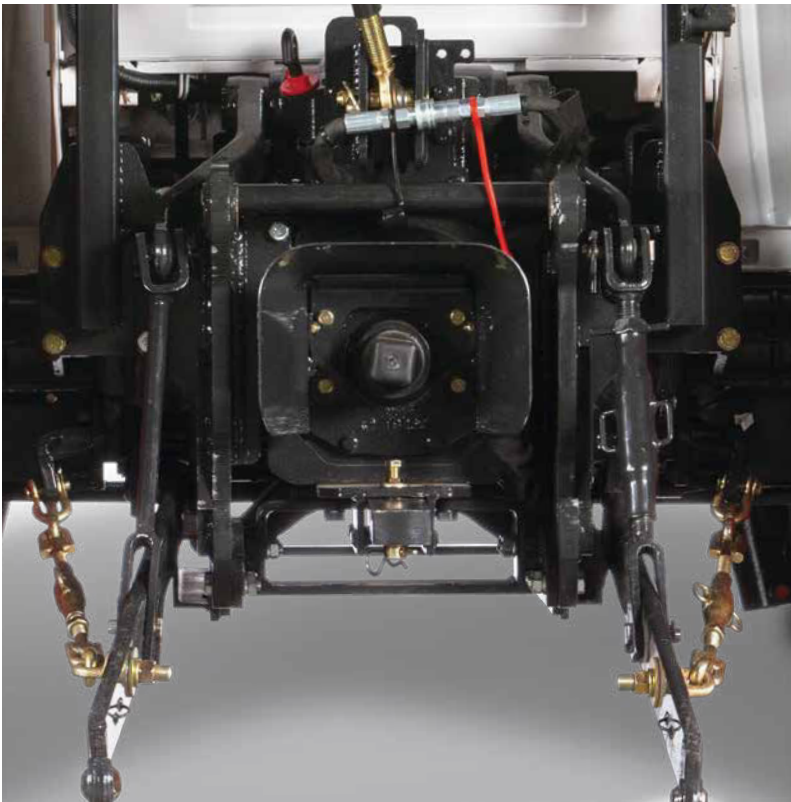

Tier 4 Diesel Engine

The powerful Tier 4 engines offer robust, high-power performance, plus an efficient fuel system. You'll enjoy reliable tractor start-ups and long component life, as well as low noise and vibration for comfortable work.

Metal Hood

The metal hood, designed to provide great visibility from the operator station, stands up to tough jobs, reliably protecting the engine and components from dirt and debris.

Polymer Fuel Tank

A heavy-duty polymer fuel tank maintains fuel integrity and eliminates rust-related contamination.

Brush Guard

Included with the optional front-end loader and also available separately, the heavy-duty brush guard protects your tractor's front end from debris,



COMFORT



Low Noise, Low Vibration

The engine in your Bobcat compact tractor is designed to produce low noise levels with minimal vibration to keep you working comfortably and focused on the task.

Headlights

Bright headlights illumins

Foldable Roll-Over Protective Structure (ROPS)

The ROPS is designed to protect the operator in the event of a roll-over (when the ROPS is locked in the up position and the seat belt is fastened). The foldable ROPS can be temporarily lowered when driving under trees, into garages or in other low-clearance areas.



VERSATILITY

DO MORE WITH ONE MACHINE

From mowing to grading to digging, your property presents endless opportunities to get outside and get something done. From front to back, Bobcat tractors are well equipped for it.



Rear PTO and 3-Point Hitch

The 3-point hitch is a key to your tractor's versatility. It enables you to do a large number of tasks on your property with both drag-behind and PTO-powered implements.

Flip-Up PTO Guard

Image shows optional backhoe sub frame installed.





Hard-working Bobcat implements and attachments are made to handle the numerous possibilities you uncover on your land.

Bobcat provides you access to a world of Bobcat implements and front-end loader attachments – so you can get the most work from your tractor investment. Whether it's moving snow, installing a fence or taking care of animals, when you have the right tractor and the right implement or attachment, there is virtually no task that's beyond your ability.

There are more than 550 dealer locations in North America, so you're never far from an expert source of implements, attachments, accessories, parts and service.



Rear ballast



3 pt. box blade









3 pt. rotary cutter




3 pt. tiller

SPECIFICATIONS

						
Model	CT4045 HST	CT4045 SST	CT4050 HST	CT4050 SST	CT4055 SST	CT4058 HST
Engine	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Gross Horsepower	44.9 hp (33.5 kW)	44.9 hp (33.5 kW)	50.3 hp (37.3 kW)	50.3 hp (37.3 kW)	55.0 hp (41.0 kW)	57.7 hp (43.0 kW)
No. of Cylinders	3	3	3	3	3	3
Total Displacement	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)
Fuel Tank Capacity	12.7 gal. (48.0 L)	11.9 gal. (45.0 L)	12.7 gal. (48.0 L)	11.9 gal. (45.0 L)	11.9 gal. (45.0 L)	12.7 gal. (48.0 L)
3-Point, PTO & Hydraulics						
PTO Horsepower	32.8 hp (24.5 kW)	41.6 hp (31.0 kW)	39.3 hp (29.3 kW)	45.6 hp (34.0 kW)	49.6 hp (37.0 kW)	45.1 hp (33.7 kW)
3-Point Hitch	Category 1	Category 1	Category 1	Category 1	Category 1	Category 1
Lift Control Type	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System	Hydraulic Position Control System
3-Point Lift Capacity	2716 lb. (1232 kg)	2716 lb. (1232 kg)	2716 lb. (1232 kg)	2716 lb. (1232 kg)	2716 lb. (1232 kg)	2716 lb. (1232 kg)
Rear PTO	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Rear PTO System	Independent	Independent	Independent	Independent	Independent	Independent
Mid-PTO	Optional: 2119 rpm	—	Optional: 2119 rpm	—	—	Optional: 2119 rpm
Total Hydraulic Pump Capacity	16.5 gpm (62.4 L/min.)	14.1 gpm (53.4 L/min.)	16.5 gpm (62.4 L/min.)	16.5 gpm (62.4 L/min.)	14.1 gpm (53.4 L/min.)	16.5 gpm (62.5 L/min.)
Rear Hydraulics	1 Pair Std (2nd Pair Opt)	Opt 2 Pairs	1 Pair Std (2nd Pair Opt)	Opt 2 Pairs	Opt 2 Pairs	1 Pair Std (2nd Pair Opt)
3-Point Link Stabilizers	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle
Lower Links	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
Lifting Rod	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle
Drive System						
Standard Transmission	3-Range HST	8F X 8R Synchro	3-Range HST	8F X 8R Synchro	8F X 8R Synchro	3-Range HST
Brakes	Wet Multi-disc	Wet Multi-disc	Wet Multi-disc	Wet Multi-disc	Wet Multi-disc	Wet Multi-disc
Rear Differential Lock	Std	Std	Std	Std	Std	Std
Four-Wheel Drive	Std	Std	Std	Std	Std	Std
Travel Speeds (w/ Ind. Tires)						
Forward	18.5 mph (29.7 km/hr.)	17.5 mph (28.2 km/hr.)	18.5 mph (29.7 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	18.5 mph (29.7 km/hr.)
Reverse	12.9 mph (20.8 km/hr.)	17.1 mph (27.6 km/hr.)	12.9 mph (20.8 km/hr.)	17.1 mph (27.5 km/hr.)	17.1 mph (27.1 km/hr.)	12.9 mph (20.8 km/hr.)
Dimensions						
Overall Length (w/ 3 pt.)	125.5 in. (3189 mm)	125.5 in. (3189 mm)	125.5 in. (3189 mm)	125.5 in. (3189 mm)	125.5 in. (3189 mm)	125.5 in. (3189 mm)
Overall Width						
Ag Tires	67.0 in. (1702 mm)	67.0 in. (1702 mm)	67.0 in. (1702 mm)	67.0 in. (1702 mm)	67.0 in. (1702 mm)	67.0 in. (1702 mm)
Industrial Tires	69.8 in. (1722 mm)	69.8 in. (1722 mm)	69.8 in. (1722 mm)	69.8 in. (1722 mm)	69.8 in. (1722 mm)	69.8 in. (1722 mm)
Turf Tires	72.2 in. (1834 mm)	72.2 in. (1834 mm)	72.2 in. (1834 mm)	72.2 in. (1834 mm)	72.2 in. (1834 mm)	72.2 in. (1834 mm)
Overall Height	97.4 in. (2473 mm)	97.4 in. (2473 mm)	97.4 in. (2473 mm)	97.4 in. (2473 mm)	97.4 in. (2473 mm)	97.4 in. (2473 mm)
Wheelbase	71.2 in. (1810 mm)	71.2 in. (1810 mm)	71.2 in. (1810 mm)	71.2 in. (1810 mm)	71.2 in. (1810 mm)	71.2 in. (1810 mm)
Ground Clearance (w/ industrial tires)	15.3 in. (387 mm)	15.3 in. (387 mm)	15.3 in. (387 mm)	15.3 in. (387 mm)	15.3 in. (387 mm)	15.3 in. (387 mm)
Weight	3745 lb. (1698 kg)	3745 lb. (1698 kg)	3745 lb. (1698 kg)	3745 lb. (1698 kg)	3745 lb. (1698 kg)	3745 lb. (1698 kg)
Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering
Inside Turning Radius (w/ assisted braking)	103.5 in. (2630 mm)	103.5 in. (2630 mm)	103.5 in. (2630 mm)	103.5 in. (2630 mm)	103.5 in. (2630 mm)	103.5 in. (2630 mm)
Tilt Steering Wheel	Std	Std	Std	Std	Std	Std
Safety Equipment						
Safety Interlock System (neutral start-operating)	Std	Std	Std	Std	Std	Std
Fold Down ROPS (roll-over protective structure)	Std	Std	Std	Std	Std	Std
Fully Retractable Seat Belt	Std	Std	Std	Std	Std	Std
Features						
Adjustable Seat	Std	Std	Std	Std	Std	Std
Cup Holder	Std	Std	Std	Std	Std	Std
Glow Plug Engine Pre-heat	Std	Std	Std	Std	Std	Std
Toolbox	Std	Std	Std	Std	Std	Std
Head Lights/Tail Lights/ Brake Lights	Std	Std	Std	Std	Std	Std
Cruise Control	Opt	—	Opt	—	—	Opt
Spark Arrestor Muffler	Std	Std	Std	Std	Std	Std
Horn/Hazard Flasher/Turn Signals	Std	Std	Std	Std	Std	Std
Rear Working Light	Opt	Opt	Opt	Opt	Opt	Opt
Side Mirror	Opt	Opt	Opt	Opt	Opt	Opt

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.

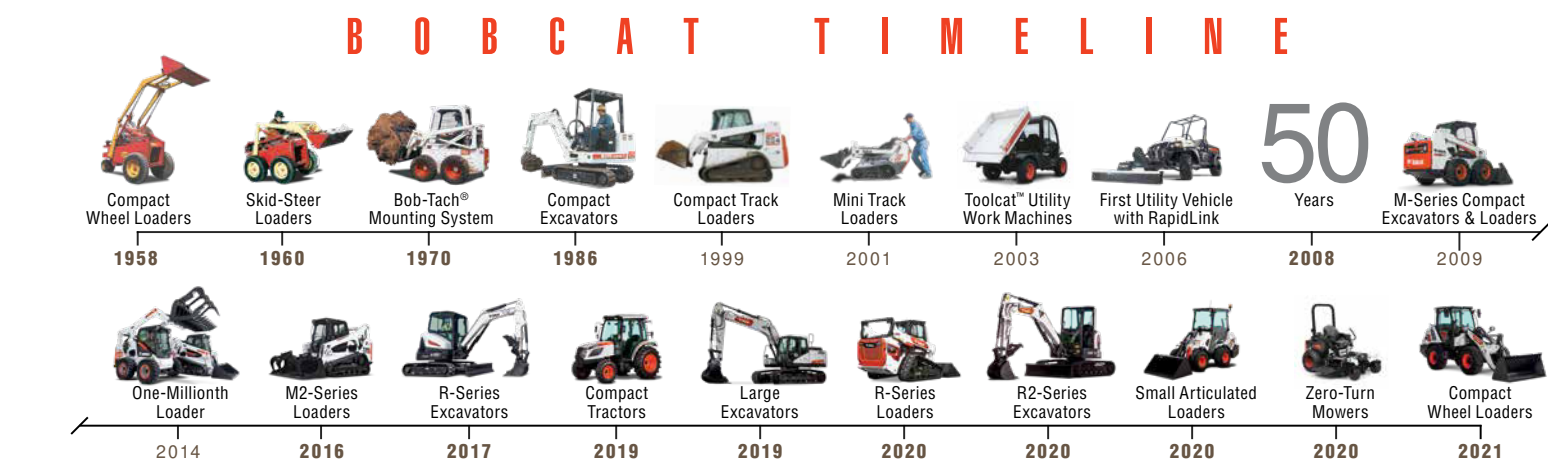



YOU ARE ONE TOUGH ANIMAL[®]

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat[®], the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2022 Bobcat Company. All rights reserved.



Printed on 10% recycled paper

B-2282 (02/22)
EP-XX-0222-80404-F

Bobcat Company
250 East Beaton Drive • West Fargo, ND 58078

Bobcat.com



Bobcat[®]

One Tough Animal.